




Electrically conductive LUVOCOM® from antistatic to highly conductive


- Electrical resistance up to $10^{-0,5} \Omega$
- Adjustable conductivity
- Wear resistant materials
- Weight reduction and design freedom
- Customized solutions



CONDUCTIVE



Conductive compounds have decisive advantages over metals or coatings: they offer a great degree of freedom in design; the finished parts have a lower weight, are easier and more cost-effective to manufacture and are also tougher. Electrically conductive polymeric materials are produced by adding conductive substances such as carbon fibers, carbon nanotubes (CNTs), steel fibers or graphites. The desired electrical resistance can be adjusted during the process: from 10⁹ Ohm (antistatic formulation) to less than 10⁹ Ohm (antistatic formulation) up to 10¹ Ohm (conductive materials). The chart below shows examples for PA compounds with different concentrations of carbon fibers.

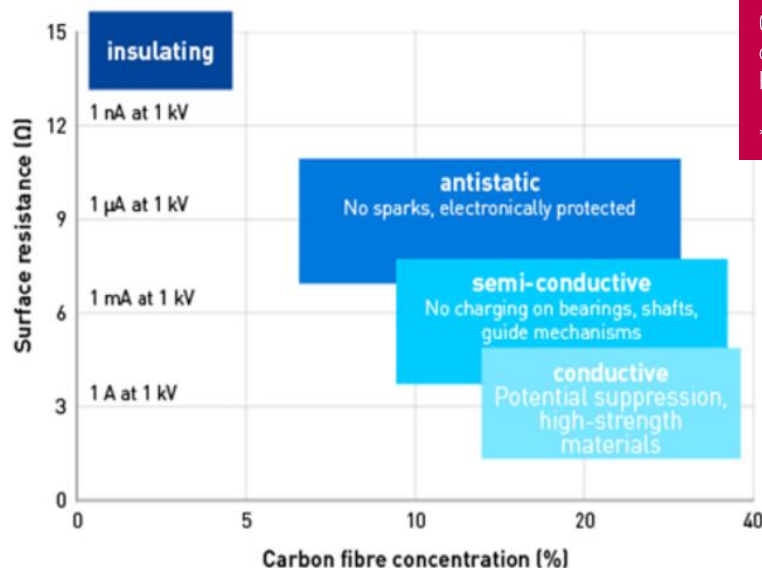


Conductivity range* of electrically conductive LUVOCOM.
Example for PA 66 compounds with CF

* Further explanation on next page

The typical fields of application for electrically conductive compounds are many and varied. In addition to covers and machine parts for explosion-protected areas, electrical and electronic components, the range also includes casings and functional parts for paper transport (examples include office machinery and cash dispensers). Conductive compounds are additionally used in carriers for electrically sensitive products (electronic components, explosive substances), where statically generated electricity has to be carried away immediately in order to avoid disruption or explosions resulting from spark discharge.



Conductive wheel

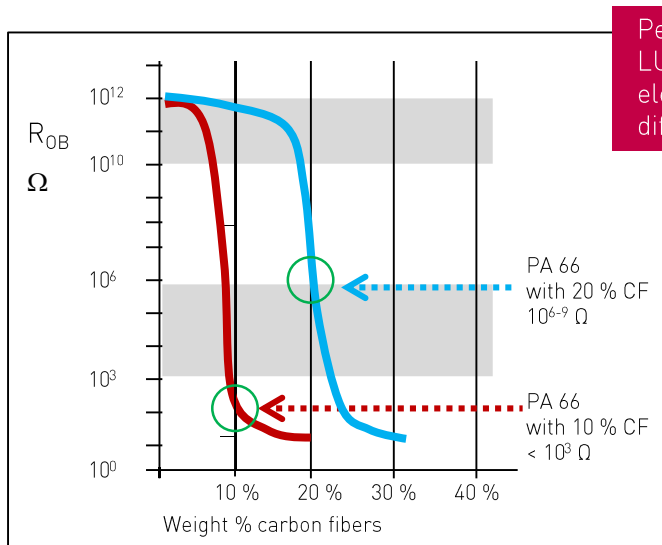

Percolation curves of two LUVOCOM compounds. Specific electrical properties achieved by different modification technology.



Smart-Pen
Material: ABS conductive


Areas for electrical surface resistance

- $R_{0B} 10^6 - 10^{10} \Omega$ Area for Antistatic Compounds**
 - Ex areas, protection against disruptive discharge
 - Slow electrostatical discharge for electronic applications
- $R_{0B} 10^3 - 10^6 \Omega$ ESD area (Electric Static Dissipative)**
 - For fast electrostatical discharge
 - For grounding discharge
- $R_{0B} 10^0 - 10^3 \Omega$ Area of High Conductivity**
 - Materials for shielding of electromagnetic fields of high frequencies
 - Current conduction in mA area

Colored carbon fiber compounds based on PA 66



Our Material Competences

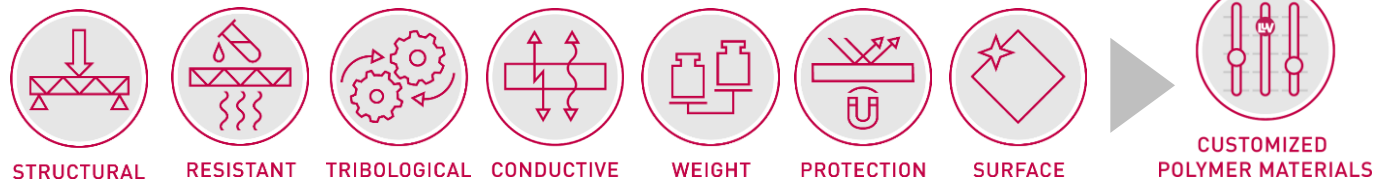

<p>Europe & Head Office Lehmann&Voss&Co. KG Alsterufer 19 20354 Hamburg Germany Tel +49 40 44 197 250 Fax +49 40 44 198 250 E-mail luvocom@lehvoss.de</p>	<p>North America LEHVOSS North America, LLC 185 South Broad Street Pawcatuck, CT 06379 USA Tel +1 855 681 3226 Fax +1 860 495 2047 E-mail info@lehvoss.us</p>	<p>Asia LEHVOSS (Shanghai) Chemical Trading Co., Ltd. Unit 4805 Maxdo Centre 8 Xingyi Road, Changning District Shanghai 200336 China Tel +86 21 6278 5181 E-mail info@lehvoss.cn</p>
--	---	--



www.luvocom.com

Any recommendations made for use of Seller's materials are made to the best of Seller's knowledge and are based upon prior tests and experience of the Seller believed to be reliable; however, Seller does not guarantee the results to be obtained and all such recommendations are non-binding – also with regard to the protection of third party's rights –, do not constitute any representation and do not affect in any way Buyer's obligation to examine and/or test the Seller's goods with regard to their suitability for Buyer's purposes. No information given by the Seller is to be construed in any way as a guarantee regarding characteristics or duration of use, unless such information has been explicitly given as a guarantee.